

AREA 10 SPS

03.6009/03.6009AU/03.6009UK



Bluetooth®
Light control app



INCL. SPS BATTERY 8Ah
ITEM NO. 03.6004



3
years
warranty*

PATENT PROTECTED

* go to scangrip.com to register



224 SMD LEDs




177 lm/W




300-30000
lux@0.5m



360°
10000lm@100%
7500lm@75%
5000lm@50%
2500lm@25%
1000lm@10%



180°
5000lm@100%
3750lm@75%
2500lm@50%
1250lm@25%
500lm@10%



11.1V / 8000 mAh
Backup:
7.4V/1000mAh



1-10h @360°
2-20h @180°
Backup: 1h@10%/1000lm



2h@80%



Max 84W



-10° to +40° C



IK07



1m



IP65



380x198x198 mm



3.8 kg



INCL. SPS CHARGER 85W
ITEM NO. 03.6008
INPUT: 100-240V AC 50/60HZ
OUTPUT: 12.6V DC 6.8A
CABLE: 5m 2x0.75mm² H05RN-F

Above specifications apply to the work light only

Work light specifications

GB AREA 10 SPS

WARNING-Risk of fire
Minimum distance from
lighted objects 0.1m



WARNING / BATTERY TIPS

- Always respect applicable legislation for working with electrical equipment in order to reduce the risk of accidents
- Avoid looking directly into the beam of light, as this will result in dazzling
- Do not use the lamp near a naked flame
- Protect the mains cable from oil, heat and sharp edges
- Only use SCANGRIP SPS battery packs. Internal backup battery must be replaced with an original SCANGRIP battery
- Opening the lamp is not advisable, as doing so could contribute to the lamp no longer being water-tight
- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced
- Luminaire is only suitable for direct mounting on non-combustible surfaces
- The luminaire is designed to work with all SCANGRIP SPS battery packs. Likewise, the battery chargers can be used to power the luminaire
- If the lamp is disconnected from mains and the battery is discharged, push the power button to enable internal back up battery. 10% LED will blink to indicate back up mode
- The red charging indicator lights up during charging
- The green charging indicator lights up when charging is completed.

The process to delete the pin code is:

- Turn on the Bluetooth function
- Press the Bluetooth button for 10 second
- The pin code is reset

Integrated BLUETOOTH light control


- Turn lamp on/off or adjust lamp output
- Connect up to 4 lamps together
- Assign pincode to prevent other users from controlling the lamp



Compliant with iPhone 5 or higher / Android 5.0 or higher. Go to iTunes App Store / Download the app from our website

USE:

- To turn the lamp on or off, press the A button.
- To increase the brightness, press the B button.
- To decrease the brightness, press the C button.
- When the brightness level is changed, the new value is saved, and the lamp will start at that level the next time it is turned on.
- To change from 360° mode to 180° mode and vice versa, press and hold the D button for 2 seconds.
- To enable/disable Bluetooth, press the A button.

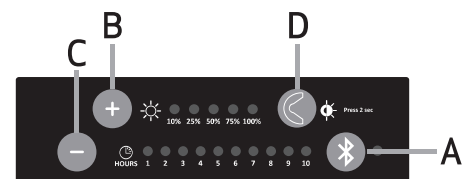

Power bank

- Built-in power bank with USB outlet to charge mobile devices
- Output: 5V, 1A

The power bank will automatically shut down when the battery pack is discharged or removed. When using the power bank while the power supply is connected, the luminous output will be reduced to 75%.



Discarded electrical products must not be disposed of together with household waste. Please use recycling facilities. Ask your local authority or retailer for advice on recycling.

- The battery must be removed from the device before it is broken up
- The device must be disconnected from the mains when the battery is removed
- Please dispose of the battery safely